



WBPA1315A

1.3 – 1.5 GHz 4 Watts Power AMPLIFIER

REV A
February 2017

Key Features



- 50 Ohm Impedance
- 1.3 ~ 1.5 GHz
- 1.8 dB Noise Figure
- 48.0 dBm Output IP₃
- 31.0 dB Gain
- 36.0 dBm P_{1dB}
- 1.5:1 VSWR
- Single Power Supply
- >34 years MTBF
- Unconditional Stable
- RoHS Compliant

Product Description

WBPA1315A is integrated with WanTcom proprietary low noise amplifier technology, high frequency micro electronic assembly techniques, and high reliability design to realize optimum low noise figure, wideband, high linearity, and unconditional stable performances together. With single +10.0V DC operation, the amplifier has optimal input and output matching in the specified frequency range at 50-Ohm impedance system. The amplifier has standard SMA connectorized WP-6 Gold plated housing.

The amplifier is designed to meet the rugged standard of MIL-STD-202g.

CAUTION:



ELECTROSTATIC DISCHARGE SENSITIVE

Applications

- Mobile Infrastructures
- GPS
- CATV/DBS
- Defense
- Security System
- Measurement
- Fixed Wireless



Specifications

Summary of the electrical specifications WBPA1315A at room temperature


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	S ₂₁	1.3 – 1.5 GHz		31		dB
2	Gain Variation	ΔG	1.3 – 1.5 GHz		+/- 0.5	+/-0.75	dB
3	Input VSWR	SWR ₁	1.3 – 1.5 GHz		1.5:1	2:1	Ratio
4	Output VSWR	SWR ₂	1.3 – 1.5 GHz		1.5:1	2:1	Ratio
5	Reverse Isolation	S ₁₂	1.3 – 1.5 GHz		45		dB
6	Noise figure	NF	1.3 – 1.5 GHz		1.8	2.5	dB
7	Output Power 1dB Compression Point	P _{1dB}	1.3 – 1.5 GHz	35	36		dBm
8	Output-Third-Order Interception Point	IP ₃	Two-Tone, P _{out} +0 dBm each, 1 MHz separation	45	48		dBm
9	Current Consumption	I _{dd}	V _{dd} = +10 V		1.0		A
10	Power Supply Voltage	V _{dd}		+9.7	+10	+10.3	V
11	Thermal Resistance	R _{th,c}	Junction to case			8	°C/W
12	Operating Temperature	T _o		-40		+85	°C
13	Maximum Input CW RF Power	P _{IN, MAX}	DC – 6 GHz			15	dBm

Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	12
Drain Current	A	1.2
Total Power Dissipation	W	12
Input CW RF Power	dBm	15
Channel Temperature	°C	150
Storage Temperature	°C	-55 ~ 125
Operating Temperature	°C	-40 ~ 85
Thermal Resistance	°C/W	8

Operation of this device above any one of these parameters may cause permanent damage.

Functional Block Diagram

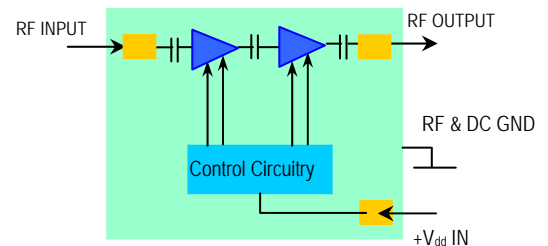


Ordering Information

Model Number	WBPA1315A
---------------------	-----------

Specifications and information are subject to change without notice.




Typical Data

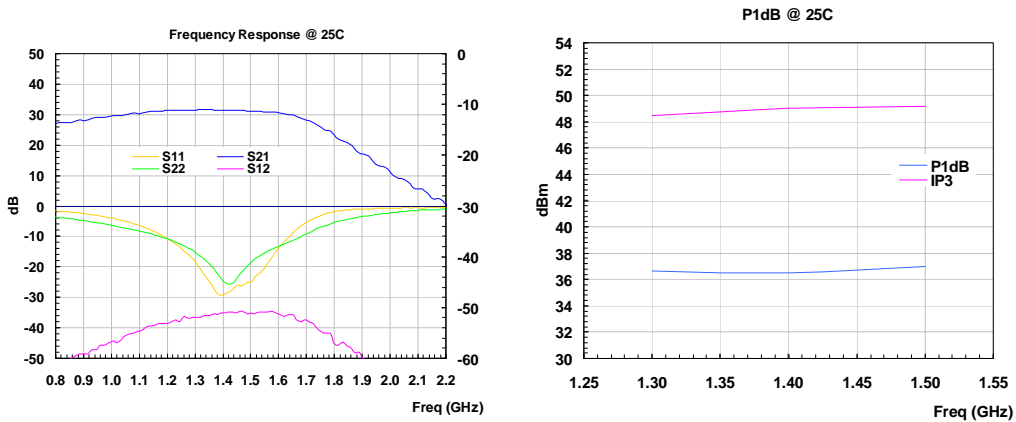

Outline, WP-6 Housing

UNITS: INCH [mm]
 BODY: Brass
 Finish: Gold Plating
 RF Connector: SMA F Gold
 V_{dd} PWR: Feed through

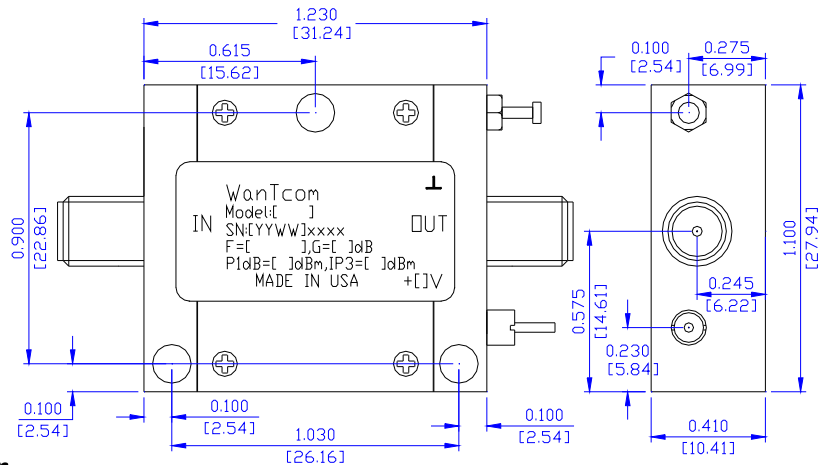

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the good torque wrench choice from Agilent Technology.

B. DC Power Line Connection

Strip the insulation layer at the end of DC power supply wire. The stripped distance should be in the range of 0.100" to 0.200". The 24 ~ 26 American Wire Gauge wire is suitable. Wound the stripped terminal wire about 1 to 2 turns on the DC feed thru center pin. Solder the wounded wire and the center pin together. Clean the soldering area by Q-tip with alcohol to remove the flux and residue.

Repeat the process to solder the DC return wire on the ground turret.

C. Mounting the Amplifier

Use three pieces of #4-40 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

Specifications and information are subject to change without notice.